

INSTALLATION AND OPERATING MANUAL OF A FIREPLACE FOR GRILLING HOUSES

A hood with hanging chains for a flue pipe

Components

- A1. Top part of flue pipe with the hat and the roof collar
- A2. Bottom part of the flue pipe
- A3. Hood
- A4. Hanging chains, 3 pcs; à 2 m

Installing

- Install the top part A1 of the flue pipe into a proper opening in the roof of the grilling house, from above the roof, so that the collar on the top part of the flue pipe covers the edges of the opening.
- Place the bottom part A2 of the flue pipe onto the hood A3 in the intended attachment slot. If wished, the connection between the hood A3 and the flue pipe A2 can be sealed with heat-resistant silicone.
- Attach the 3 hanging chains A4 to the hood A3 in the intended attachment slots.
- Take the hood A3 together with the bottom part A2 of the flue pipe and connect it to the top part A1 of the flue pipe so that the top end of the bottom part A2 of the flue pipe goes into the bottom end of the top part A1 of the flue pipe; fix the bottom part A2 of the flue pipe to a suitable height by attaching its hanging chains to the load-bearing structure of the roof in the intended attachment places. If necessary, the connection between the bottom part A2 and top part A1 of the flue pipe can be sealed with heat-resistant silicone.

B Fireplace with support pipe and grilling grates

Components

- B1. Fireplace, 1 pc
- B2. Support element of the fireplace, 2 pcs
- B3. Support frame of the fireplace's grilling grate, with the grilling grate, 1 set
- B4. Ash drawer, 1 pc
- B5. Sheet steel screw, 8 pcs
- B6. Support pipe for fixing the round grilling grate, 1 pc
- B7. Support frame of the round grilling grate, with the grilling grate, 1 set
- B8. Round steel fixing element for fixing the height of the round grilling grate, 1 pc
- B9. Hanging hook, 1 pc
- B10. Wooden flange element of the fireplace, 6 pcs
- B11. Carrier of a wooden flange element, 12 pcs
- B12. Wood screw 4.5 x 16, 24 pcs

Assembling and installing

- Install the support elements B2 so that the screw openings in the longer sides of the elements coincide, then connect the elements to each other with sheet steel screws B5 (2 pcs).
- Put the fireplace B1 onto the assembled fireplace support so that the Stoveman logo on the fireplace remains facing the same direction as the open side of the fireplace support and that the

screw openings in the fireplace and in its support coincide. Then connect the fireplace and its support with sheet steel screws (6 pcs).

- Install all carriers of wooden flange elements to the assembled fireplace, using the proper connections.
- Put the wooden flange elements onto their carriers (one element on two carriers) and set them properly in place. The slanted edges of the wooden flange elements should have a space of 6-8 mm between them, and the distance between the inner side of an element and the metal edge of the fireplace should be at least 20 mm.
- After setting the wooden flange elements in place, fix each element to a carrier with 2 wood screws.
- Put the ash drawer into its compartment under the fireplace.
- Install the support frame B7 of the round grilling grate onto the support pipe B6 and fix it to the required height with the round steel fixing element B8, employing the relevant opening of the support pipe. Then put the support pipe into 2 pipe sockets on the interior side of the fireplace. The support frame B7 can be fixed to 3 different heights. If necessary, a hanging hook can be installed to the support pipe.
- If wished, the grilling grate B3 can be installed to the fireplace. For that, put the grilling grate's frame onto the fireplace so that the recess in the rear edge of the frame rests on the metal edge of the fireplace.
- Put the assembled fireplace under the hood, lining them up vertically. Attach the fireplace to the floor of the grilling house or shed, employing the \varnothing 6 mm anchoring openings of the angled elements fixed to the fireplace support.

Package

- A1, A2;
- A3;
- A4, B4, B5;
- B1;
- B2;
- B3;
- B6; B8; B9;
- B7;
- B10;
- B11; B12.

Commissioning

The first fire must be made without food on the grill grate as the heat-resistant paint of the fireplace hardens completely only after the first fire and it may give off an unpleasant smell in the beginning. Until then, avoid scratching the fireplace.

The first fire should be kept for at least one hour.

Using

1. The fireplace is intended for the enjoyment of fire and/or cooking food on open flame or hot coals in a grilling house or a shed.
2. Only wood logs or grilling coals may be used as fuel. Burning anything else in the fireplace may damage it and cause dangerous situations.

Safety requirements

The fireplace must be installed onto a level floor or base. Respect all building requirements and fire safety requirements in force at the place of installation when installing and using the fireplace.

1. Do not leave the fireplace without supervision during or after use of the fireplace, unless the burning material (wood, coals) is fully burned up or the burning rests have been doused with water.
2. Only wood logs or grilling coals may be used as fuel.

All questions concerning fire safety should be directed to the local authority responsible for the field.

Complaints can be filed within 24 months from the date of purchase.

The warranty does not apply to the following:

- Paint damages and corrosion caused in the course of using the fireplace;
- The entire product if fuel disallowed by these instructions has been used or if a building requirement or a fire safety requirement in force at the place of installation has been violated.

Manufacturer:

AS Eesti Vanglatööstus

Harku tee 59

76901 TABASALU ESTONIA

Tel. +372 677 6700

Fax +372 677 6701


stoveman@stoveman.ee

www.stoveman.ee




This picture shows the wooden flange elements with a round edge, but they are also available with a straight edge.

Elements A

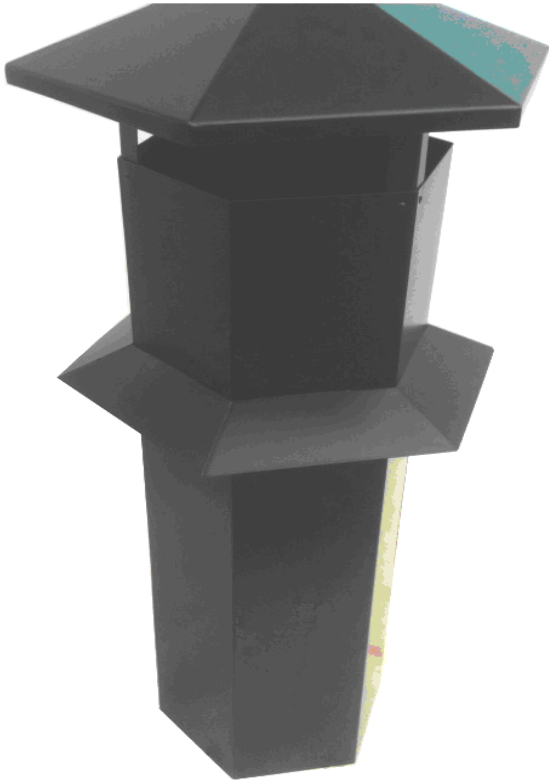


A1

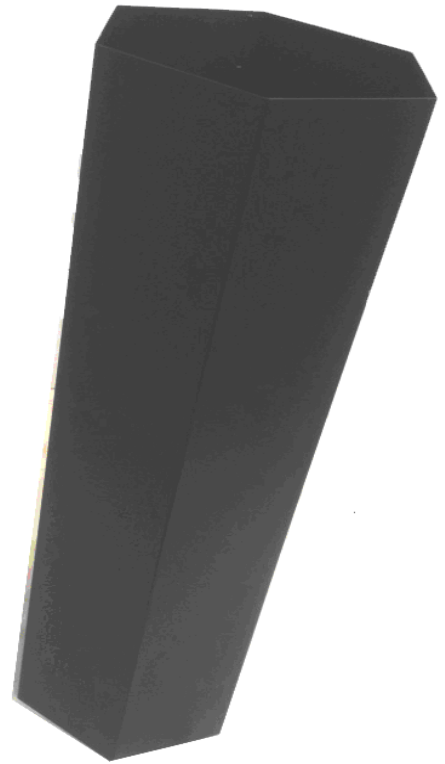

A2




A3

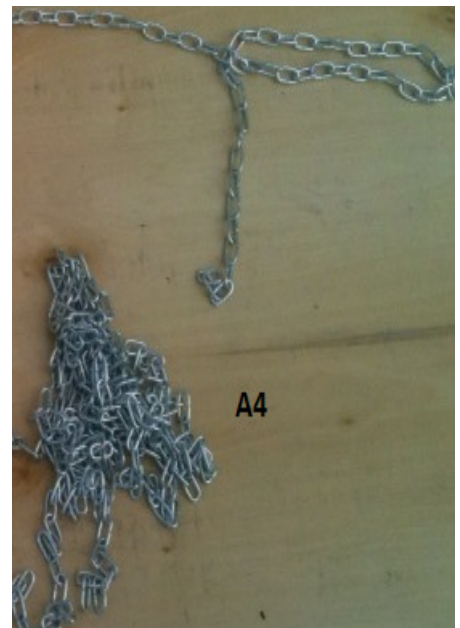


A4


Elements B

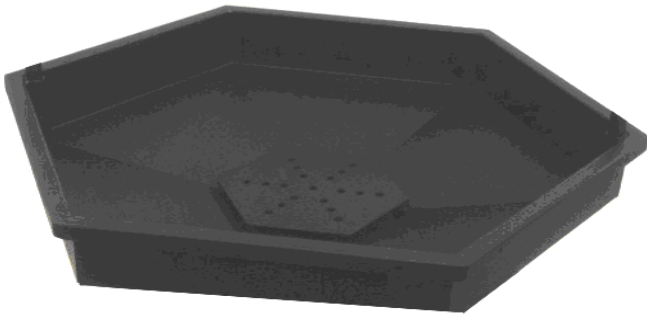


B1

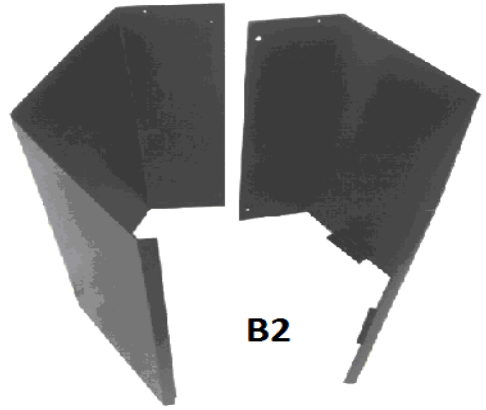

B2



B3

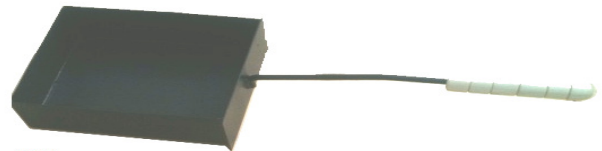


B4




B6



B7




B8



B9





B11

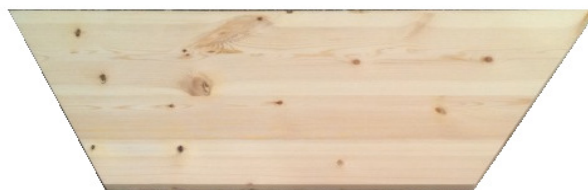

B10

Order of assembly

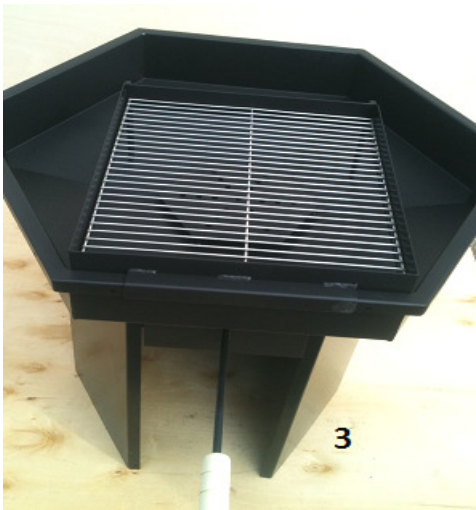

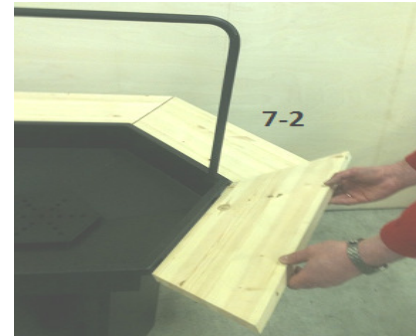

NB! If you remove the carriers of wooden flange elements from the fireplace, mark their locations in relation to the fireplace; this makes it easier to reinstall them later.